

Cartridge Smoke Filter Unit



Less energy costs

Low compressed air usage due to differential pressure controlled filter cleaning as and when needed.



Non-stop operation

Suitable for high levels of smoke and dust due to automatic filter cleaning.




Start-Stop automatic (optional)

The link to the welding machine is saving time and energy.



Comfortable operation

Comfortable adjustment of self-supporting exhaust arm into every desired position with only one hand.

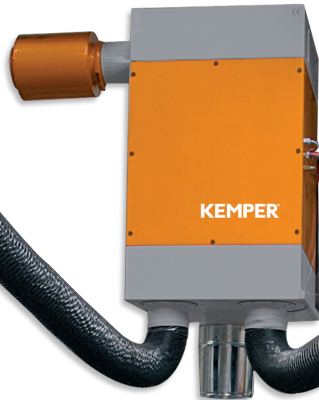

LED work light (optional)

Allows a good view onto the workpiece which leads to a better performance and supports the operator to re-position the hood.



Low-contamination dust extraction

Hardly any contact with substances hazardous to health due to the dust-free discharge into a dust collection container.



One unit for two workplaces

Space-saving and inexpensive: simultaneous or alternating work at two places.



40 % more welding fume capture

Less adjustment required due to larger capture area with flange-shaped hood.

