WallMaster

Art. No.: 65 750



Applications

- · Medium levels of smoke and dust
- Modular extensionin combination with capturing elements
- · One or two workplaces

Benefits

- · Increased safety with safe filter change
- Very economic due to long lasting high capacity filters
- Inexpensive welding smoke filter for retrofitting of existing capturing elements
- Robust filter monitoring by means of pressure gauge

Properties

- Retrofittable
- · Integrated lifting device for filter change
- · Easy and quick installation
- · Compact and solid design
- · Mechanical operation of the filter unit


Technical Data


Filter	
Filter stages	2
Filter method	Disposable filter
Filter surface	42 m²
Type of filter	Safe Change Filter
Filter material	Non-woven polyester
Filter efficiency	> 99.5 %
Filter class	E12
Basic data	
Dimensions (w x h x t)	765 x 715 x 795 mm
Weight	65 kg
Suitable for air volumes of up to	1600 m³/h












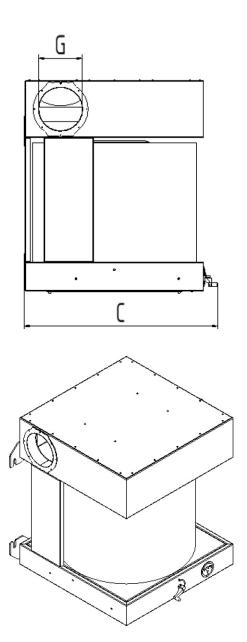

Technical Data

Dimensions	
А	795 mm
В	765 mm
С	715 mm
Е	660 mm
F	660 mm
G	160 mm

