

# AirDome

Art. No.: 390 660



## Applications

- Workshops where local exhaust ventilation is not possible
- To complement local exhaust ventilation systems
- Environments with changing sources of smoke and dust
- Workstations, Workshops, Logistic and distribution centres
- Energy-saving general ventilation

## Properties

- EC fans with IE5 motors exceed legal efficiency requirements and set new standards in energy efficiency
- Automatic filter cleaning
- Available in different voltage versions
- Hardly any air turbulence enables work in the immediate vicinity without draughts
- Lifting eyes & forklift pockets
- Optimised air routing ensures low noise levels and increased efficiency
- Effective baffle plates for spark pre-separation
- Contamination-free dust disposal in one-way containers.
- Displacement flow principle, recommended by health and safety bodies

## Benefits

- State-of-the-art EC technology adapts to demand and therefore runs particularly energy-efficiently - saves operating costs and protects the environment
- Optimum capture height - extraction takes place at the exact height at which the welding fumes accumulate
- Space-saving, innovative design - minimum footprint with maximum performance
- Status check via large illuminated display (optional) - For easy monitoring of the operating status
- A space-saving miracle with an extreme 11,770 cfm extraction capacity on a 16 ft<sup>2</sup> footprint
- Extremely easy to maintain thanks to maintenance-free fans and convenient access thanks to the large maintenance door
- Extremely high volume flow - ideal for demanding applications
- Low risk potential due to foreign bodies
- Constant air flow guarantees a constant level of clean air
- Safe transport and easy installation thanks to lifting eyes & forklift pockets
- Minimization of heating costs due to air recirculation and air distribution
- Enormously long filter lifetime due to optimised air flow
- Increased safety with contamination-free dust disposal
- Cost-effective installation or retrofit, as no ductwork is needed
- Permanent operation by means of automatic dust disposal in dust collection bin

## Mode of operation

- Intake of ambient air via built-in EC fans
- The filtered, clean air exits at the bottom of the system with low momentum in a 360° radius
- The warm cleaned air directs the welding smoke again towards the inlet grills and so, a slow air circulation and at the workstations is created.



## Technical Data

### Filter


Filter stages	1
Filter method	Cleanable filter
Filter cleaning method	Rotating nozzle
Filter surface	323 ft <sup>2</sup>
Number filter elements	6
Filter surface total	1938 ft <sup>2</sup>
Filter material	KemTex® ePTFE membrane
Filter efficiency	> 99.9 %
Dust classification	M

### Basic data

Max. fan performance	16480 cfm
Extraction capacity	4709 - 11770 cfm
Dimensions (w x t x h)	49 x 49 x 159 in
Weight	1929 lbs
Motor power	19.2 hp
Power supply	3 x 600 V / 60 Hz
Rated current	16 A
Control voltage	24 V, DC
Noise level	72 dB(A)

### Additional information

Fan type	Radial fan, direct driven
Compressed air supply	73 - 87 PSI
Capacity Dust collection container	6.6 gal

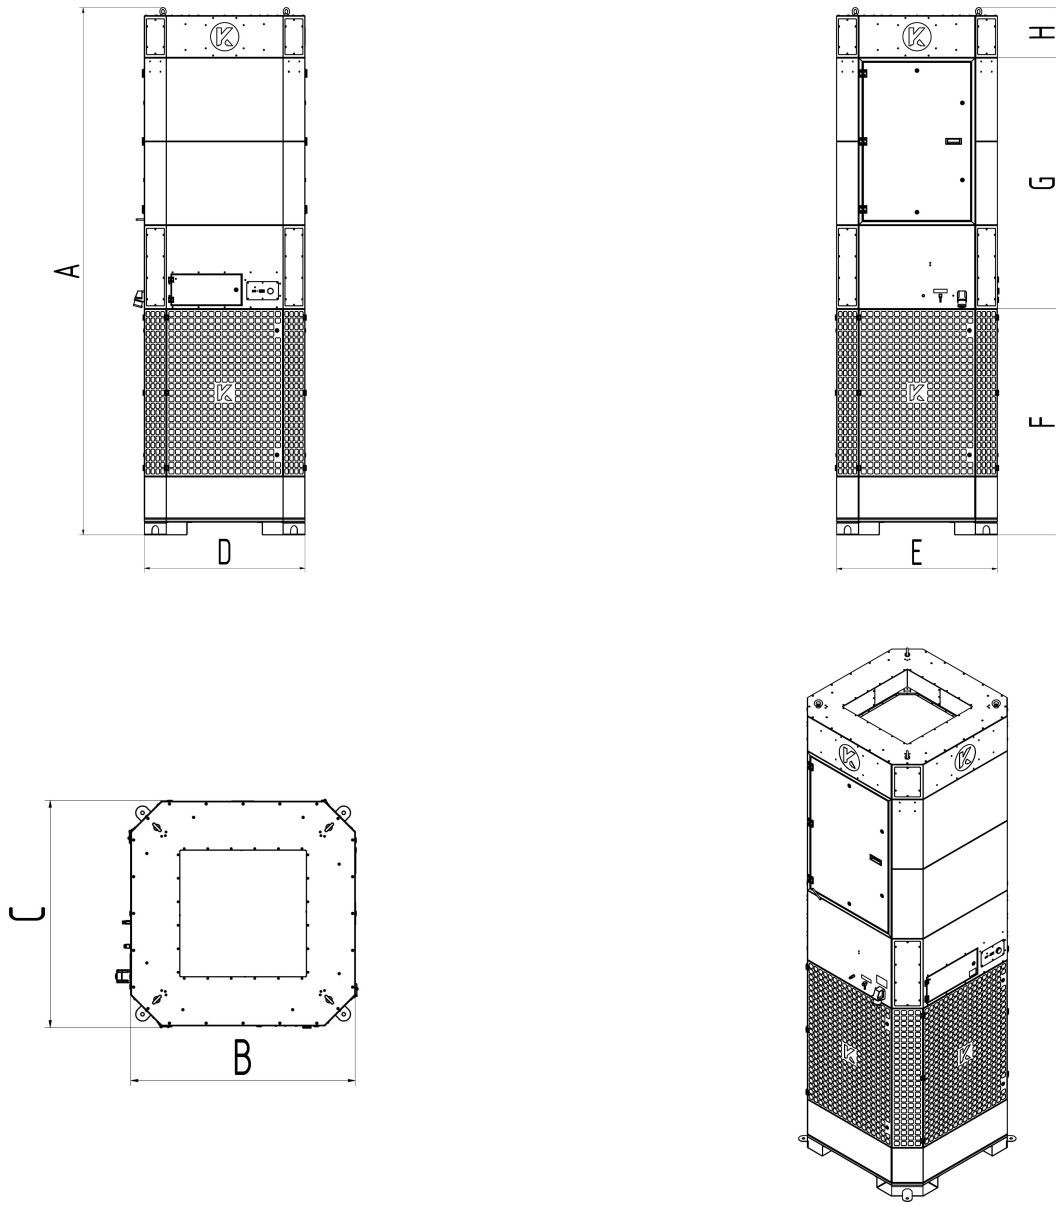

## Technical Data

Dimensions	
A	161 in
B	53 in
C	50 in
D	49 in
E	49 in
F	69 in
G	77 in
H	15 in