Exhaust arm

Art. No.: 79 002



Benefits

Applications

· Non-stop operation

 Fast operation due to particularly flexible adjustment

· Welding fumes, gases, vapours, light dusts

· High levels of smoke and particles

- 40% less adjustment of the exhaust arm needed due to exhaust hood design
- User-friendly due to particularly smooth movement of the hood with one hand

· For connection to fans or central extraction systems

- · Arm keeps position due to self-supporting design
- Various options to connect the exhaust arms to fans, stationary devices or via duct work to central extraction and filtration systems

Technical Data

Basic data	
Weight	17 kg
Additional information	
Exhaust arm type	flexible exhaust arm
Diameter extraction arm	150 mm
Length of exhaust arm	2 m
Joints	1

Properties


- · 360 degrees rotating exhaust hood with damper
- · Self-supported by internal springs

Scope Of Supply

- · Exhaust arm with hood
- · Wall bracket



Pressure loss

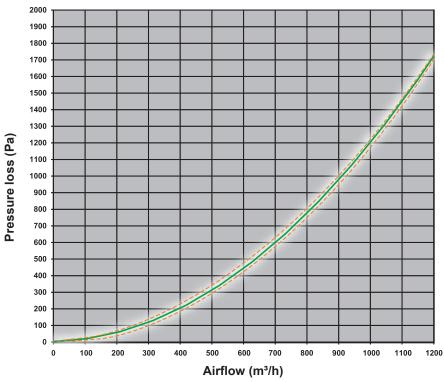

--- Variation depending to working position

Dimensions

