

# Exhaust arm - one-piece boom

Art. No.: 79 206



## Technical Data

| Basic data              |                      |
|-------------------------|----------------------|
| Weight                  | 66 kg                |
| Additional information  |                      |
| Exhaust arm type        | flexible exhaust arm |
| Diameter extraction arm | 150 mm               |
| Length of boom          | 2 m                  |
| Length of exhaust arm   | 4 m                  |
| Total length            | 6 m                  |
| Joints                  | 2                    |

## Applications

- For connection to fans or central extraction systems
- High levels of smoke and particles
- Non-stop operation
- Welding fumes, gases, vapours, light dusts
- Large workpieces

## Benefits

- Reduced tripping hazard by attaching tools or wire feed unit to the boom with carriage
- 40% less adjustment of the exhaust arm needed due to exhaust hood design
- User-friendly due to particularly smooth movement of the hood with one hand
- Arm keeps position due to self-supporting design
- Fast operation due to long reach and particularly flexible adjustment
- Various options to connect the exhaust arms to fans, stationary devices or via duct work to central extraction and filtration systems


## Properties

- 360 degrees rotating exhaust hood with damper
- Self-supported by internal springs
- Boom with 50 kg load capacity
- Boom with integrated C-rail with carriage
- Exhaust arms up to 6 m (with boom)

## Scope Of Supply

- Exhaust arm with hood
- Boom
- Wall bracket

# Pressure loss

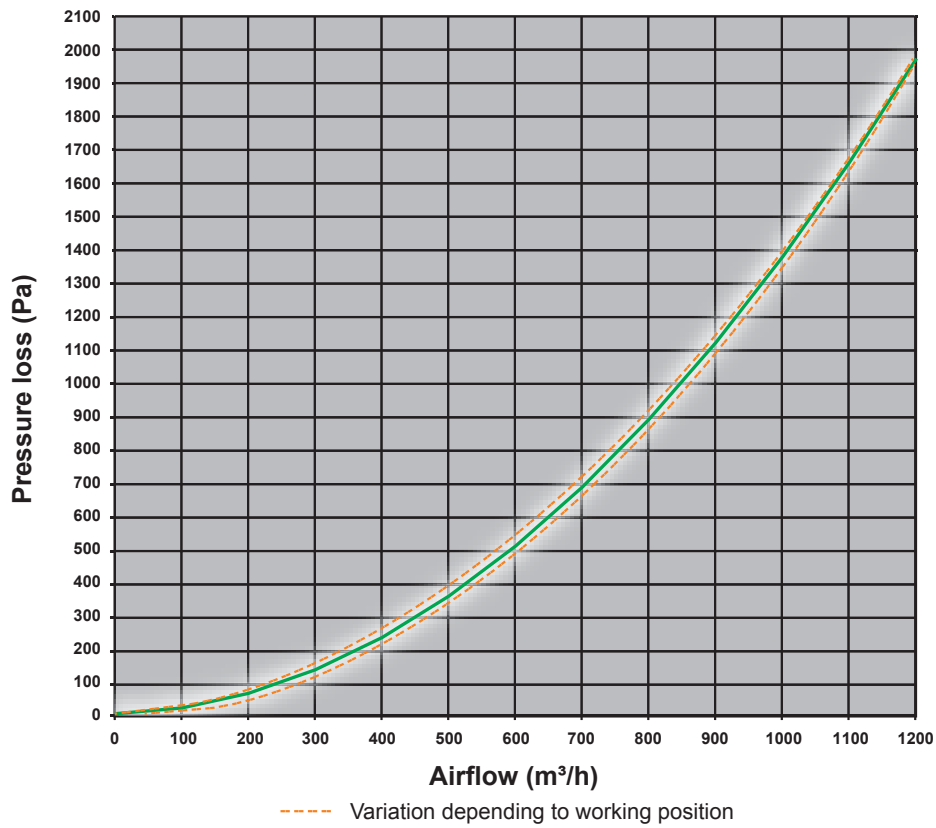

# Dimensions

