


KemTab HiEnd

Art. No.: 510 847

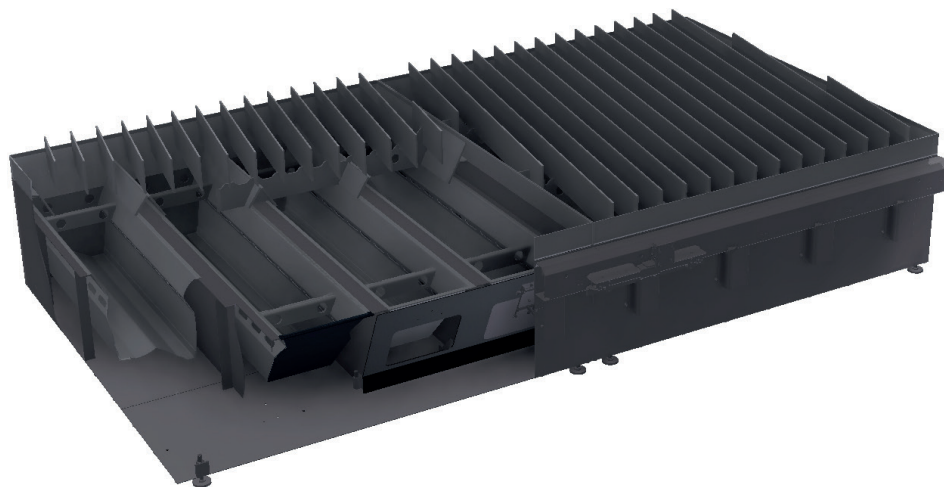

Applications

- For plasma cutting of up to 600 Ampere (short term 800 A and higher)
- For gas cutting with sheet metal up to 300 mm thick

Benefits

- Use with particularly high cutting currents and material thicknesses possible due to the material support surface and table construction being separate and due to the external pneumatic system
- Energy cost savings due to low extraction volume thanks to individual control of the extraction dampers of the segment in use
- No mechanical influence of the cutting system in non-contact electronic-pneumatic control of the extraction dampers
- Time and cost savings when cleaning the table due to large slag trays and thus longer cleaning intervals
- Low wear on the pneumatic system since it is separated from the air stream

Properties

- Low extraction volume
- Robust, self-supporting material support
- Material support and lower part of the table are separate from each other
- Large, reinforced slag trays
- Various pneumatic control options of the extraction damper in the individual table segments
- Air flow and mechanical system are separated from each other
- Modular design

Technical Data

Basic data

Table width (Material support)	2.200 mm, 2.700 mm, 3.100 mm, 4.400 mm
Table height	850 mm
Table lengths	Any
Segment distance	515 mm