


KemTab Vibro

Art. No.: 510 848

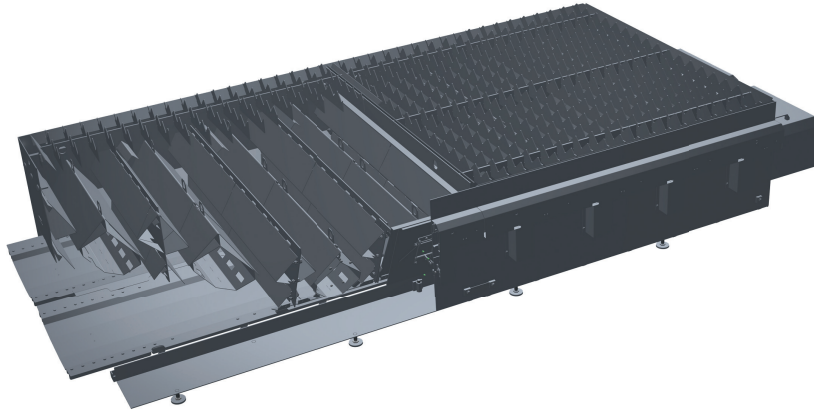

Applications

- For plasma cutting up to 400 amps (short peaks 450 A)
- For gas cutting with sheet metal up to 150 mm thick

Benefits

- Better utilization and efficiency of the cutting system due to automatic waste discharge and therefore minimal downtime for cleaning
- Better cut quality and less wear due to innovative design of the material support easyFRAME
- No external follow-up costs caused by in-house production of wear parts due to easyFRAME
- No cleaning or maintenance required on the material support as it can be easily replaced (easyFRAME)
- Energy cost savings due to low extraction volume thanks to individual control of the extraction dampers of the segment in use
- No mechanical influence of the cutting system in non-contact electronic-pneumatic control of the extraction dampers
- Low wear on the pneumatic system since it is separated from the air stream

Properties

- Automatic discharge of slag by vibration conveyor
- Low extraction volume
- Standard material support or easyFRAME
- Various pneumatic control options of the extraction damper in the individual table segments
- Exterior pneumatic system
- Air flow and mechanical system are separated from each other
- Modular design

Technical Data

Basic data	
Table width (Material support)	2.100 mm, 2.600 mm, 3.100 mm, 4.200 mm
Table height	820 mm
Material support frame	EasyFrame Advance