


KEMPER TheSlagger

Art. No.: 998 56

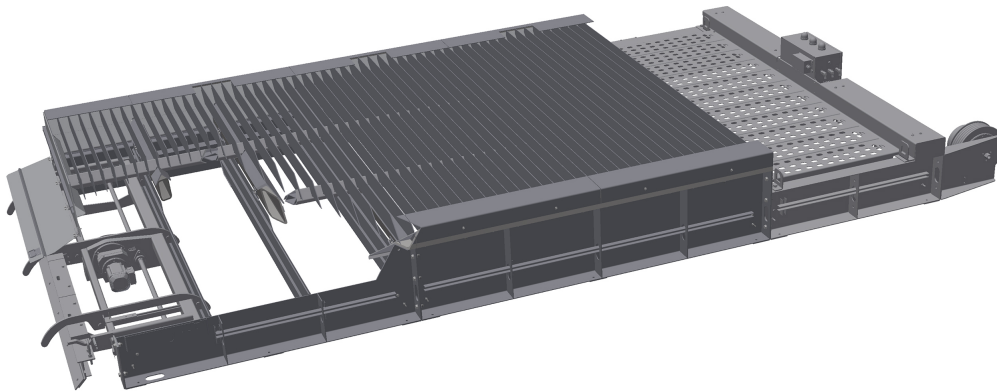

Applications

- For plasma cutting up to 400 amps
- For oxy-fuel cutting of sheet metal up to 300 mm thick depending on table width

Benefits

- Energy cost savings due to low extraction volume thanks to individual control of the extraction dampers of the segment in use
- Time and cost savings when cleaning the table due to the automatic removal system
- Highest possible health and safety protection for employees as there is no contact with the slag and dust during cleaning
- No long downtimes of the cutting system thanks to the automatic removal system

Properties

- Flexible table size design (length, width)
- Low extraction volume
- Hardly any downtimes for cleaning

Technical Data

Basic data	
Table width (Material support)	1.700 mm, 2.000 mm, 2.310 mm, 2.615 mm, 2.920 mm, 3.225 mm
Table height	787 mm
Segment distance	750 mm